



CITY OF WYANDOTTE - Department of Engineering & Building Permit #: _____

Application for Concrete Permit for Driveway, Curb Cut & Approach

Rec'd By: _____

Date: _____

This Application must be complete and legible before a Concrete Permit will be issued.

Date: _____

Location: _____

Applicant's Name: _____ Address: _____
Phone #: _____

Owner's Name: _____ Address: _____
Phone #: _____

Lot Size: _____ feet WIDE (x) _____ Interior Lot () Corner Lot ()

STATE CLEARLY THE NATURE OF THE PROPOSED WORK:

PLOT PLAN

Inside Lot Line ()

Side Street ()

Or Alley ()



Section 23a of the state construction code act of 1972, 1972 PA 230, MCL 125.1523A, prohibits a person from conspiring to circumvent the licensing requirements of this state relating to persons who are to perform work on a residential building or a residential structure. Violators of section 23a are subjected to civil fines.

X _____
Applicant's Signature

For Office Use Only: Approved By: _____ Date: _____

Comments: _____

CITY OF WYANDOTTE
DEPARTMENT OF ENGINEERING AND BUILDING
Specifications for City Sidewalks, Driveways and Approaches

A permit is required for the replacement of city sidewalk, driveways, and driveway approaches. Permit fees are as follows:

- a. City Sidewalk - minimum fee \$40.00 for up to 50 feet, then \$1.00 per additional lineal foot.
- b. Approaches/Curb Cut - minimum fee \$35.00 up to 12 feet, then \$1.00 per additional foot.
- c. Driveway - \$40.00

The applicant must be homeowner or licensed contractor. Unlicensed contractors must submit a bond or insurance policy in the amount of \$1,000.00 minimum.

All sidewalk and driveway aprons removed or damaged during construction operations shall be replaced with concrete in accordance with these specifications.

Sidewalks constructed on a level, compacted subgrade shall be a minimum 4 inches thick, increasing at driveways to 6 inches for residential and 8 inches for commercial.

The sidewalk subgrade and surface shall slope one inch per 5 feet from property side of walk toward street.

Driveway aprons shall be a minimum 6 inches thick for residential and 8 inches thick for commercial.

Driveways must extend 20 feet past the front of the house.

It is recommended that the curb be left at least 1½ inches above gutter grade when cut to allow for future resurfacing.

Residential curb cuts are limited to a maximum length of 20 feet, all other subject to approval of the City Engineer.

Asphalt approaches and sidewalks **are not** permitted, only asphalt over concrete driveways or an asphalt driveway is permitted.



Concrete shall be of 3500 PSI minimum compressive strength when cured in moist air at 70° F. for 28 days.

All slabs shall be edged by a ¼ inch radius edger tool. One half (½) inch asphalt expansion joints shall be placed not more than 50 feet apart in a continuous length of new sidewalk and between all abutting service walks, drives, approaches buildings and curbs.


The Permit Holder shall notify the Department of Engineering for subgrade inspection not less than 24 hours prior to placing concrete. A final inspection is required after all forms have been removed, edges backfilled, and site cleaned up.

Sidewalk shall be lightly textured to create a non-skid finish. Example: Broom finish.

OVER

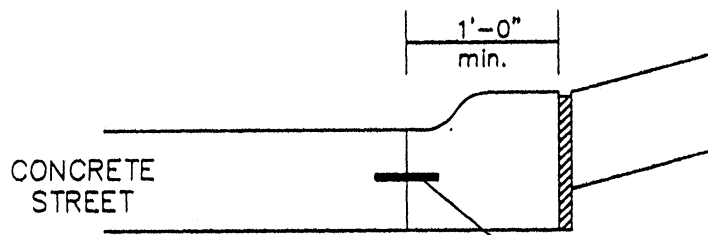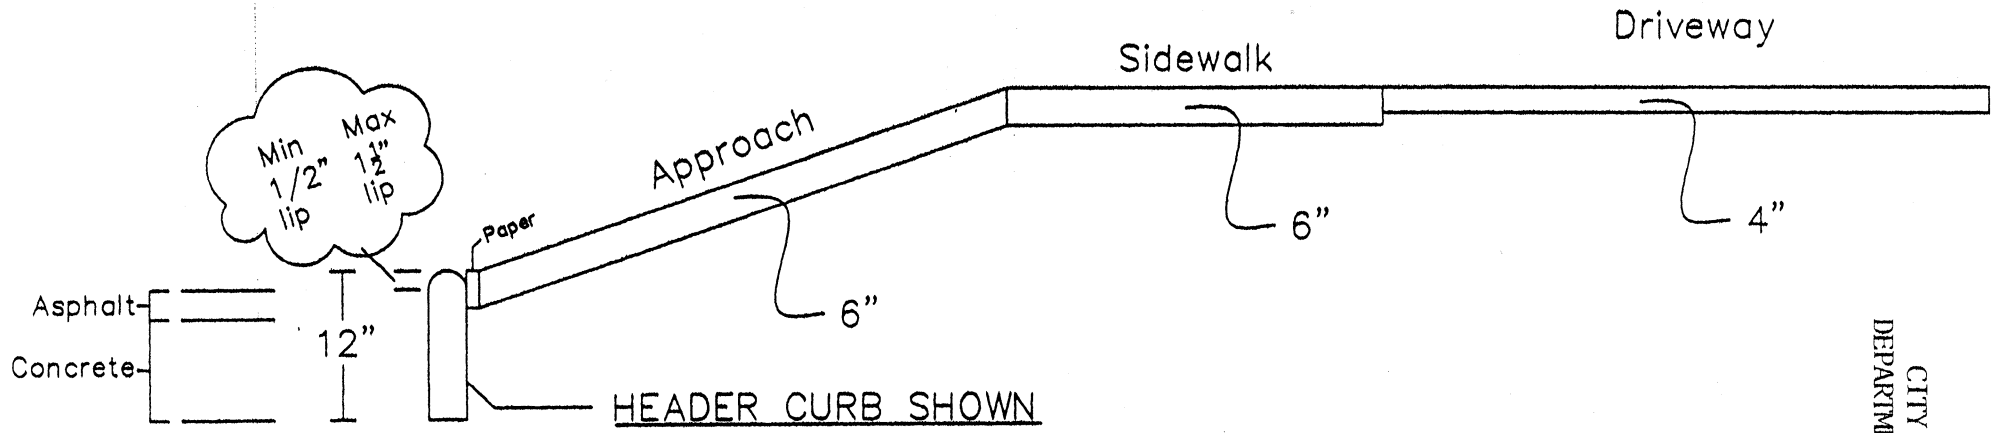

INTEGRAL CURB

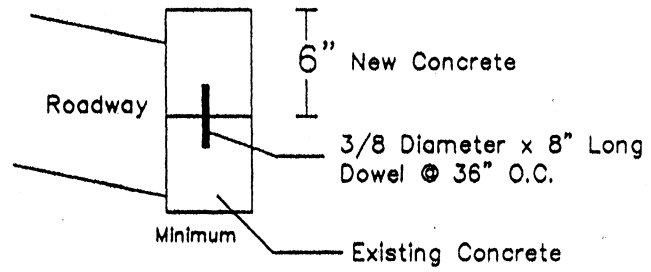

HEADER CURB

3/8 Diameter x 8" Long Dowel @ 36" O.C.